



# KuMax (1000 V / 1500 V)

## SUPER HIGH EFFICIENCY POLY<sup>GEN4</sup> MODULE

### CS3U-345|350|355|360P

With Canadian Solar's industry leading black silicon cell technology and the innovative LIC (Low Internal Current) module technology, we are now able to offer our global customers high power poly modules up to 360 W.

The KuMax poly modules with a dimension of 2000 x 992 mm, close to our 72 cell MaxPower modules, have the following unique features:

- **Higher** power classes for equivalent module sizes
- **High** module efficiency up to 18.15 %
- **LOW** hot spot temperature risk
- **LOW** temperature coefficient (Pmax): -0.38 % / °C
- **LOW** NMOT (Nominal Module Operating Temperature): 43 ± 2 °C



More power output thanks to low NMOT: 43 ± 2 °C



Low power loss in cell connection




Safer: lower hot spot temperature



Heavy snow load up to 5400 Pa, wind load up to 2400 Pa



Low BoS cost with 1500 V<sub>dc</sub> system voltage

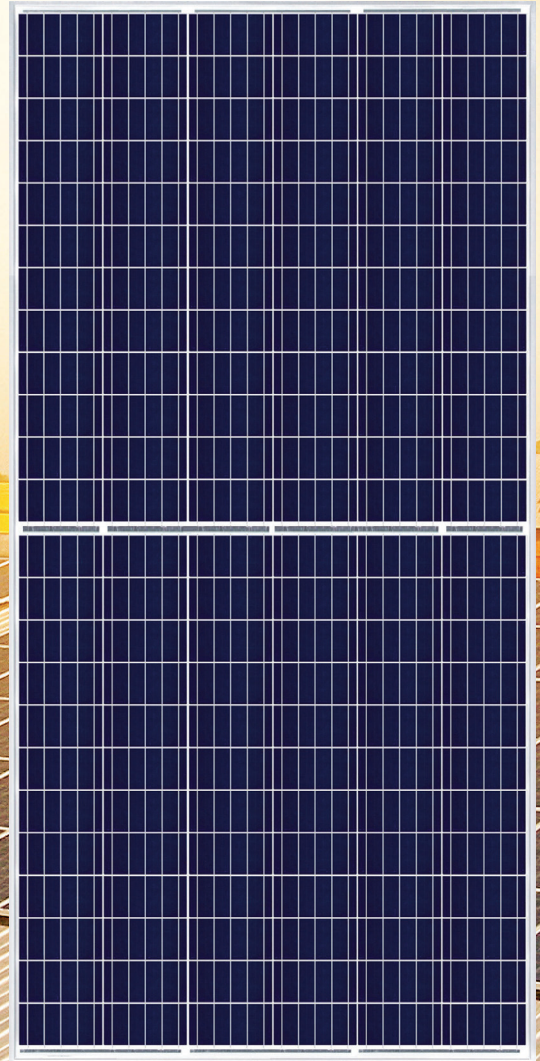

linear power output warranty



product warranty on materials and workmanship

#### PRODUCT CERTIFICATES\*

IEC 61215 / IEC 61730: 2005 & 2016: VDE / CE / UL 1703: CSA



\* Please contact your local Canadian Solar sales representative for the specific product certificates applicable in your market.

